

AB PROFIT HOGA AUR BHI ZYAADA



FE
Series

BS6 P2
Phase 2 Ready

1212 LPT


TATA TRUCKS
DESH KE TRUCKS

Technical Specifications

Models	1212 LPT
Engine	4SP CR125PS BS6
Engine Type	4 Cylinder Square pattern in line water cooled direct Injection diesel engine with E-VGT Turbocharger
Engine Displacement	2 956 cc
Power	92 kW (125 Ps) @ 2 800 r/min
Torque	350 Nm @ 1 300 - 2 200 r/min
Clutch	Single plate dry friction type - 310 mm dia
Gearbox	GBS 40 (5F, 1R), Cable Shift Mechanism
Gearbox Ratio	1st - 8.98, 2nd - 4.77, 3rd - 2.63, 4th - 1.66, 5th - 1, Rev - 8.29
Suspension - Front Type	Parabolic Suspension with rubber bush and Hydraulic double acting telescopic shock absorbers
Suspension - Rear Type	Semi-Elliptical Leaf Spring with Aux Springs
Tyres	8.25 R 20 - 16PR Radial Low CRR Tyre (FR-2, RR-4, Spare -1)
Front Tyre Spec	8.25 R 20 - 16PR Radial Low CRR Tyre
Rear Tyre Spec	8.25R 20 - 16PR Radial Low CRR Tyre
Cabin Type	Day Cab
Steering Type*	Tilt & Telescope Power Steering (Dia - 420 mm 2 spoke)
Brakes Type	Dual Circuit Full Air S* Cam Brakes With Auto Slack Adjuster (Drum - Drum) (dia - 360 mm)
Ground Clearance	225 mm
Gradeability	30.5 %
Rear Axle	TATA RA 1109R Fully Floating Benjo Axle (RAR - 5.857)
Battery	12 V - 100 Ah
Fuel Tank Capacity	160 L / 250 L
Load Body Variants	Cab, CLB, High Deck, Container, Reefers
GVW	11 990 kg
FAW	3 735 kg
RAW	8 255 kg
Long member Size (LxBxH)	200 mm x 60 mm x 5 mm
Warranty	3 years or 3 00 000 km
DEF Tank Size	18 l
Service Interval	1 year or 40 000 km

Wheelbase	3 920 mm	4 530 mm	4 920 mm	5 300 mm
TCD	14 400 mm	16 300 mm	17 500 mm	18 700 mm
Variants	CAB	HSD	CAB	HSD
Overall Dimensions (LxWxH)	7 305 mm x 2 425 mm x 2 700 mm	7 405 mm x 2 425 mm x 3 200 mm	8 220 mm x 2 425 mm x 2 700 mm	8 320 mm x 2 425 mm x 3 200 mm
Deck length	5 218 mm (17.1 ft)	6 170 mm (20.2 ft)	6 800 mm (22.3 ft)	7 415 mm (24 ft)

Key Features & Benefits

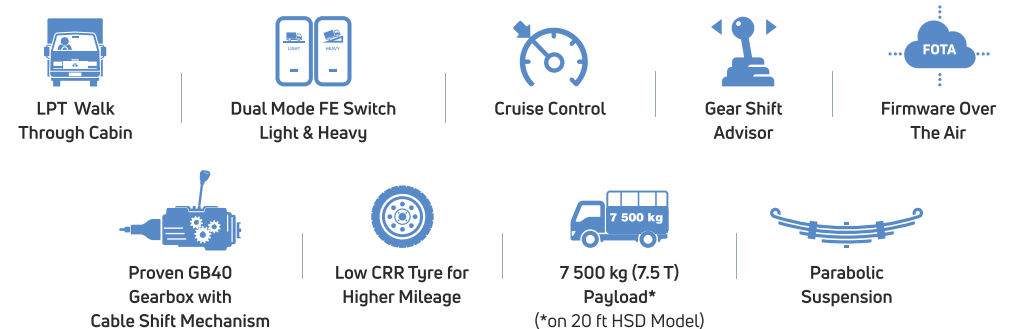

Applications



TATA MOTORS

To know more, visit your nearest Tata Motors dealership

www.light-trucks.tatamotors.com

☎ 18 00 20 97 979 Follow us on